


PCIe-GIE7x Series

2/4CH PCI Express® GigE Vision PoE+ Frame Grabbers with PoE Power Management & Protection

Features

- PCI Express® x4 compliant
- Support for 2/4 independent Gigabit Ethernet ports
- IEEE 802.3at for PoE+ (Power over Ethernet Plus)
- PoE protection and automated power budget control for enhanced asset protection
- Easy-to-use utility and API provided for PoE power management
- Multiple cards, multiple cameras, in a single system
- Wide operating temperature range from 0°C to +70°C, supporting non-drop frame capture in extreme environments
- Up to 20/60/120W PoE power from PCIe bus/4-pin/6-pin Molex connector
- Powered Device (PD) auto detection and classification
- IEEE 1588 (PTP technology, hardware only)

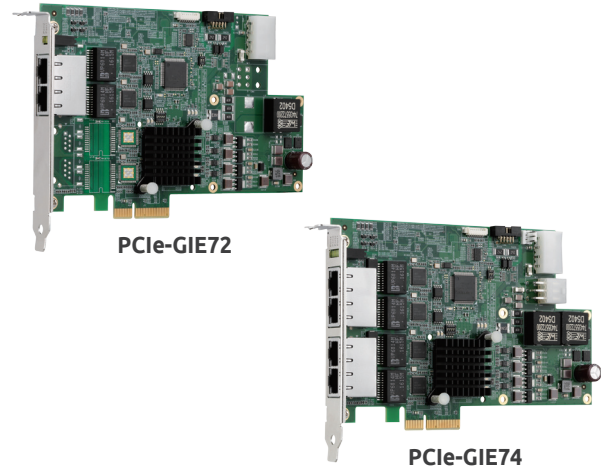

Introduction

ADLINK's PCIe-GIE72/74 PCI Express® PoE+ frame grabber supports 2/4CH independent Gigabit Ethernet ports for multiple GigE Vision connections transferring up to 1 Gb/s per port. PoE+ provides up to 30W power and automatic detection for stable, reliable connections, reducing costs, simplifying installation, and easing maintenance burdens.

Multi-card Capture Capability

Any number of PCIe-GIE7x series cards can be installed in a single system without occupying any I/O resources, for multichannel single-system machine vision grabs. Wide operating temperature range supports integration with fanless computer for IA applications in harsh environments.

Comprehensive PoE Protection Secures Assets

Exclusive comprehensive PoE Protection prevents overcurrent and overvoltage, and automated power budget control adjusts PoE port power supply automatically, avoiding equipment damage.

Smart PoE management

Easy-to-use utility and API provide real-time PoE status monitoring and control, lowering maintenance costs and predicting possible failure in advance, while PoE power priority selection and PoE-based power on/off support more demanding applications.

Software Support

- **OS Information**
Windows® 7/8.1/10
- **Software Compatibility**
C#/VB.NET/VC++

Ordering Information

- **PCIe-GIE72**
2-CH PCI Express® Power over Ethernet Plus frame grabber
Order Code: 12400
- **PCIe-GIE74**
4-CH PCI Express® Power over Ethernet Plus frame grabber
Order Code: 12401

Specifications

Model Name	PCIe-GIE74	PCIe-GIE72
Form Factor	PCI Express® x4	
Ethernet Port	4 fully-integrated Gigabit Ethernet Media Access Control (MAC) and physical layer (PHY) ports.	2 fully-integrated Gigabit Ethernet Media Access Control (MAC) and physical layer (PHY) ports.
	PoE+ (Power over Ethernet Plus), IEEE 802.3at compliant, supporting 0, 1, 2, 3, and 4, providing up to 30W	
	9 kB jumbo frame support	
Functions	IEEE 1588 (PTP technology)	
	Link Aggregation	
	Multiple cards and multiple cameras	
	PoE Protection	
	PoE Power Management	
Operating Environment	60W PoE: 0°C to +70°C (32°F to 150°F)	
	Humidity: 5% to 90% RHNC	
Power Requirements	+3.3V max @ 3A ⁽¹⁾⁽²⁾	+3.3V max @ 2.5A ⁽¹⁾⁽²⁾
Dimensions	167.6 mm x 106.6 mm (6.6" x 4.2 (W x L))	167.6 mm x 106.6 mm (6.6" x 4.2") (W x L)

Note:

(1) Max 61.6W PoE power w/ ether 4-pin (+12V@6A) or 6-pin (+12V@6A) Molex connector.

(2) Max 20W PoE power w/ PCIe slot (+12V@2.1A).